

LT/UT SERIES WINCH

UNMATCHED DURABILITY AND PERFORMANCE

Built for action, the LT and UT Series from Superwinch provide amazing pulling power from a small winch. Tried and true designs, perfected over the years offer unmatched durability and performance.





LT 2000

Built for action, the LT2000 Winch from Superwinch provides up to 2,000 lbs of reliable pulling power. This utility/multi-purpose winch features free-spooling "pull and turn" clutch and a Handle bar mounted rocker switch remote, perfect for a variety of uses. Perfected over the years, the LT Series offer unmatched durability and performance.

FEATURES:

- 2,000 lbs. capacity
- Sealed 1.0 HP permanent magnet motor
- 1-Stage planetary gearing with 153:1 ratio
- Circuit breaker protected
- Cam-style clutch control knob
- 5/32" - 50' wire rope
- Permanent/latched hook
- Zinc plated 4-way roller fairlead
- Handle bar mounted rocker switch

SPECIFICATIONS

WINCH MODEL: LT Series
PART NUMBERS: 1120210 (LT 2000), 1130220 (LT 3000)
RATED LINE PULL: 2,000 lbs. (LT 2000), 3,000 lbs. (LT 3000)
MOTOR: 1.0hp permanent magnet (LT 2000), 1.2hp sealed permanent magnet (LT 3000)
NET. WEIGHT: 14.2 lbs. (6.4kgs) (LT 2000), 20 lbs. (9.0kgs) (LT 3000)
REMOTE CONTROL: 8' handle bar mounted rocker switch (LT 2000), 12' hand-held remote (LT 3000)
GEARBOX: 1-stage planetary
GEAR RATIO: 153:1
FREESPOOL: Pull and turn (LT 2000), ergonomic control (LT 3000)
BRAKE: Automatic, load holding
WIRE ROPE: 5/32" x 50' (3.9mm x 15.2m) (LT 2000), 3/16" x 50' (4.8mm x 15.2m) (LT 3000)
FAIRLEAD: Heavy duty 4-way roller fairlead
WINCH HOOK: Heavy-duty, clevis pinned latch hook
WARRANTY: Limited 1 year
FINISH: Black
SOLENOID: Sealed, circuit breaker protected
DIMENSIONS: 11.0" x 4.1" x 4.1" (285mm x 105mm x 105mm) (LT 2000), 13.2" x 4.25" x 4.25" (335.3mm x 108mm x 108mm) (LT 3000)
MOUNTING BOLT PATTERN: 2 hole, 3.15" (80mm) on center (LT 2000), 3.0" x 4.87" (76mm x 124mm) (LT 3000)



LT 3000

LT3000 is legendary because it survives pull after pull, season after season. Built for action, the LT3000 Winch from Superwinch provides up to 3,000 lbs of reliable pulling power. Industrial-style remote control and pull and turn freespool lever are standard features and offer great value, durability and ease of operation.

FEATURES:

- 3,000 lbs. capacity
- Sealed 1.2 HP permanent magnet motor
- 1-Stage planetary gearing with 136:1 ratio
- Sealed solenoid, circuit breaker protected
- Cam-style clutch control knob
- 3/16" - 50' wire rope
- Heavy-duty, clevis pinned, latched hook
- Zinc plated 4-way roller fairlead
- 12' hand-held remote with handlebar mounted rocker switch


LT 2000 PERFORMANCE

NO LOAD	Amps	10
	Line Speed FPM (MPM)	10 (3.0)
AT LOAD	Amps	100
	Line Speed FPM (MPM)	2.5 (0.8)

LT 3000 PERFORMANCE

NO LOAD	Amps	15
	Line Speed FPM (MPM)	23 (7.0)
AT LOAD	Amps	180
	Line Speed FPM (MPM)	4.0 (1.2)

DIMENSIONS

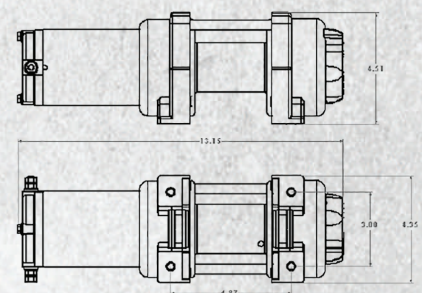



LT 4000/4000SR

Built for action, the LT4000 Winch from Superwinch provides up to 4,000 lbs of reliable pulling power. The LT4000 is a great choice for a quality, well-built winch that delivers a powerful pull season after season. Tried and true designs, perfected over the years, the LT Series offer unmatched durability and performance.

FEATURES:

- 4,000 lbs. capacity
- Sealed 1.4 HP permanent magnet motor
- 3-Stage planetary gearing with 166:1 ratio
- Sealed solenoid, circuit breaker protected
- Cam-style clutch control knob
- 50' - 3/16" wire rope/ synthetic rope
- Heavy-duty, clevis pinned, latched hook
- Zinc plated roller fairlead (wire rope)
- Aluminum hawse fairlead (synthetic rope)
- 12' hand-held remote with handlebar mounted rocker switch

PERFORMANCE

NO LOAD	Amps	20
	Line Speed FPM (MPM)	18 (5.4)
AT LOAD	Amps	320
	Line Speed FPM (MPM)	4.5 (13)



SPECIFICATIONS

WINCH MODEL: LT 4000 Series
PART NUMBERS: 1140230 (synthetic), 1140220 (wire)
RATED LINE PULL: 4,000 lbs.
MOTOR: 1.4hp sealed
NET. WEIGHT: 25 lbs. (11.3kgs)
REMOTE CONTROL: 12' hand-held remote plus handle bar rocker switch
GEARBOX: 3-stage planetary
GEAR RATIO: 166:1
FREESPOOL: Ergonomic control clutch
BRAKE: Automatic, load holding
WIRE ROPE: 3/16" x 50' (4.8mm x 15.2m)
SYNTHETIC ROPE: 3/16" x 50' (4.8mm x 15.2m)
FAIRLEAD: Aluminum machined hawse (synthetic), heavy duty 4-way roller fairlead (wire)
WINCH HOOK: Heavy-duty, clevis pinned latch hook
WARRANTY: Limited 1 year lifetime mechanical and limited 1 year electrical
FINISH: Black
SOLENOID: Sealed, circuit breaker protected
DIMENSIONS: 13.2" x 4.25" x 4.25" (335.3mm x 108mm x 108mm)
MOUNTING BOLT PATTERN: 4.87" x 3.0" (123mm x 76.2mm)

DIMENSIONS

